

# Q1 Energy Calculation

Sunday, September 20, 2015  
3:23 PM

(a)

$$E_{\rho_1} = \int_{-\infty}^{\infty} |\rho_1(t)|^2 dt = \int_0^{T_b} v^2 dt = v^2 T_b.$$

$$E_{\rho_2} = \int_{-\infty}^{\infty} |\rho_2(t)|^2 dt = \int_0^{T_b} v^2 dt = v^2 T_b.$$

} same (total) energy

(b) Because  $v$  and  $T_b$  are positive constants, we know that  $v^2 T_b$  is positive and finite.

Therefore,  $0 < E_{\rho_1}, E_{\rho_2} < \infty$ .

Hence, both  $\rho_1$  and  $\rho_2$  are energy signals  $\Rightarrow$  Yes

(c) No. Because they are energy signals, they can not be power signals.

(d) All energy signals have 0 (average) power.

To see this, consider  $P_g = \lim_{T \rightarrow \infty} \int_{-T/2}^{T/2} |g(t)|^2 dt$ .

Note that  $|g(t)|^2$  is always nonnegative. Therefore,

$$0 \leq \int_{-T/2}^{T/2} |g(t)|^2 dt \leq \int_{-\infty}^{\infty} |g(t)|^2 dt = E_g$$

$\leftarrow$   $g(t)$  is an energy signal; so, this is a finite number

$$0 \leq \frac{1}{T} \int_{-T/2}^{T/2} |g(t)|^2 dt \leq \frac{1}{T} E_g$$

$$0 \leq P_g \leq 0$$

Here, we take the limit as  $T \rightarrow \infty$ .

Therefore,  $P_g = 0$ .

(e)  $\langle \rho_1, \rho_2 \rangle = \int_{-\infty}^{\infty} \rho_1(t) \rho_2(t) dt = \int_0^{T_b/2} v \cdot v dt + \int_{T_b/2}^{T_b} (-v) \cdot (v) dt = v^2 \frac{T_b}{2} - v^2 \frac{T_b}{2} = 0$ .

Because  $\langle \rho_1, \rho_2 \rangle = 0$ , we know that  $\rho_1$  and  $\rho_2$  are orthogonal.

## Q2 Average power

Sunday, September 20, 2015  
3:17 PM

$$g(t) = 2e^{2jt}$$

We know that  $g(t) = Ae^{j(2\pi f_c t + \theta)} \Rightarrow P_g = |A|^2$ .

Here,  $A = 2$ . Therefore,  $P_g = 2^2 = 4$

$$g(t) = 2\cos(2t + 2^\circ)$$

We know that  $g(t) = A\cos(2\pi f_c t + \theta) \Rightarrow P_g = \frac{A^2}{2}$

Here,  $A = 2$ . Therefore,  $P_g = \frac{2^2}{2} = \frac{4}{2} = 2$

$$g(t) = 2\cos(2t + 2^\circ) + 2\cos(2t + 2^\circ)$$

We know that  $g(t) = A\cos(2\pi f_c t + \theta) \Rightarrow P_g = \frac{A^2}{2}$

Here,  $A = 4$ . Therefore,  $P_g = \frac{4^2}{2} = \frac{16}{2} = 8$

$$g(t) = 2\cos(2t + 2^\circ) + 22\cos(22t + 22^\circ)$$

$$= 2 \times \frac{1}{2} \left( e^{j(2t+2^\circ)} + e^{-j(2t+2^\circ)} \right) + 22 \times \frac{1}{2} \left( e^{j(22t+22^\circ)} + e^{-j(22t+22^\circ)} \right)$$

Note that the four terms here have different frequencies:

$$\frac{2}{2\pi}, \frac{-2}{2\pi}, \frac{22}{2\pi}, \frac{-22}{2\pi}$$

We know that  $g(t) = \sum_k c_k e^{j2\pi f_k t} \Rightarrow P_g = \sum_k |c_k|^2$

$$= |1e^{j2^\circ}|^2 + |1e^{-j2^\circ}|^2 + |11e^{j22^\circ}|^2 + |11e^{-j22^\circ}|^2 = 1+1+11^2+11^2 = 244$$

$$(a. i) \quad g(t) = 3 \cos(10t + 30^\circ) = \frac{3}{2} \left( e^{j(10t+30^\circ)} + e^{-j(10t+30^\circ)} \right)$$

$$= \frac{3}{2} e^{j30^\circ} e^{j10t} + \frac{3}{2} e^{-j30^\circ} e^{-j10t}$$

$$P_g = \left(\frac{3}{2}\right)^2 + \left(\frac{3}{2}\right)^2 = 2 \times \frac{9}{4} = \frac{9}{2} = 4.5$$

Assume  $f_0 \neq 0$

Alternatively, we know that for  $g(t) = A \cos(2\pi f_0 t + \theta)$ ,  $P_g = \frac{|A|^2}{2}$ .

Here,  $A = 3$ . Therefore  $P_g = \frac{|3|^2}{2} = \frac{9}{2} = 4.5$ .


$$(a. ii) \quad x(t) = g(t) \cos(10t) = \left( \frac{3}{2} e^{j30^\circ} e^{j10t} + \frac{3}{2} e^{-j30^\circ} e^{-j10t} \right) \left( \frac{1}{2} (e^{j10t} + e^{-j10t}) \right)$$

$$= \frac{3}{4} \left( e^{j30^\circ} e^{j20t} + e^{-j30^\circ} e^0 + e^{j30^\circ} e^0 + e^{-j30^\circ} e^{-j20t} \right)$$

$= 2 \cos 30^\circ = \sqrt{3}$  ← Need to combine them first because they have the same frequency.  
Euler's formula

$$P_x = \left(\frac{3}{4}\right)^2 (1^2 + (\sqrt{3})^2 + 1^2) = \frac{9}{16} (1+3+1) = \frac{45}{16} \approx 2.813$$

Note that although  $x(t) = g(t) \cos(2\pi f_0 t)$ , we can't use  $P_x = \frac{1}{2} P_g$  because  $G(f-f_0)$  and  $G(f+f_0)$  overlap in the frequency domain.

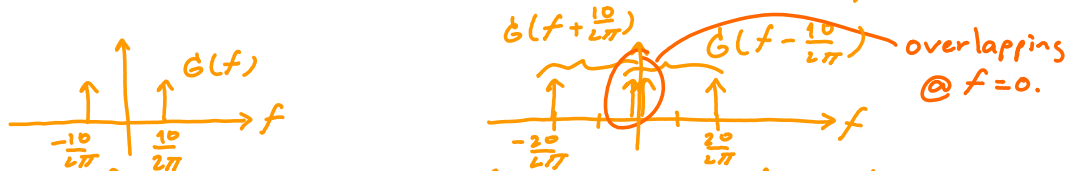

In general, for  $x(t) = a \cos(2\pi f_0 t + \theta) \cos(2\pi f_0 t + \phi)$ ,

applying the product-to-sum formula gives

$$x(t) = \frac{a}{2} \left( \cos(2\pi(2f_0)t + \theta + \phi) + \cos(\theta - \phi) \right)$$

When  $f_0 \neq 0$ , the two cosine components do not overlap in the frequency domain. Hence, the power of their sum is the same as the sum of their power.

$$\text{Therefore, } P_x = \left|\frac{a}{2}\right|^2 \left( \frac{1}{2} + \cos^2(\theta - \phi) \right).$$

Here,  $a = 3$ ,  $\theta = 0$ ,  $\phi = 30^\circ$ .

$$\text{Therefore, } P_x = \left(\frac{3}{2}\right)^2 \left( \frac{1}{2} + \cos^2(30^\circ) \right) = \frac{9}{4} \left( \frac{1}{2} + \left(\frac{\sqrt{3}}{2}\right)^2 \right) = \frac{9}{4} \left( \frac{1}{2} + \frac{3}{4} \right) = \frac{45}{16}$$


$$(a. iii) \quad y(t) = g(t) \cos(50t) = \frac{3}{2} \left( e^{j30^\circ} e^{j10t} + e^{-j30^\circ} e^{-j10t} \right) \frac{1}{2} \left( e^{j50t} + e^{-j50t} \right)$$

$$= \frac{3}{4} \left( e^{j30^\circ} e^{j60t} + e^{-j30^\circ} e^{j40t} + e^{j30^\circ} e^{-j40t} + e^{-j30^\circ} e^{-j60t} \right)$$

All of the complex exponential functions have distinct frequencies.

$$P_y = \left(\frac{3}{4}\right)^2 (1^2 + 1^2 + 1^2 + 1^2) = \frac{9}{16} \times 4 = \frac{9}{4} \approx 2.25$$

Note that  $P_y = \frac{1}{2} P_g$  because  $G(f - \frac{50}{2\pi})$  and  $G(f + \frac{50}{2\pi})$  do not overlap.

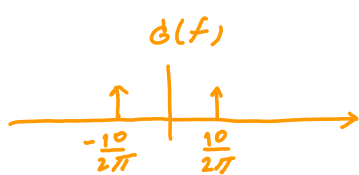

(b.i)  $g(t) = 3 \cos(10t + 30^\circ) + 4 \cos(10t + 120^\circ) = \text{Re} \left\{ (3 \angle 30^\circ + 4 \angle 120^\circ) e^{j10t} \right\}$   
 $= 5 \cos(10t + 83.13^\circ)$

Note that we do not need the phase  $83.13^\circ$  to calculate the average power. Also, we can get the magnitude "5" simply by noticing the  $90^\circ$  difference between  $3 \angle 30^\circ$  and  $4 \angle 120^\circ$ .



$P_g = 5^2 \times \frac{1}{2} = \frac{25}{2} = 12.5$

(b.ii) From part (a.ii), we have

$P_x = \frac{a^2}{8} (1 + 2 \cos^2(\theta - \phi)) = \frac{5^2}{8} (1 + 2 \cos^2 83.13^\circ) \approx 3.214$

(b.iii) Note that  $G(f)$  is still at  $\pm \frac{10}{2\pi}$  as in part (a.iii).

Therefore,  $G(f - \frac{50}{2\pi})$  and  $G(f + \frac{50}{2\pi})$  still do not overlap in the freq. domain.

$P_y = \frac{1}{2} P_g = \frac{25}{4} = 6.25$

(c.i) Look at the three components of  $g(t)$  in their phasor representation.

We have  $3 \angle 0^\circ + 3 \angle 120^\circ + 3 \angle 240^\circ = 0$

clear when you draw the three vectors



Therefore,  $g(t) = 0$ . Hence,  $P_g = 0$ .

(c.ii)  $x(t) = 0 \Rightarrow P_x = 0$

(c.iii)  $y(t) = 0 \Rightarrow P_y = 0$

Q4 Parseval's Theorem and Energy Calculation

Wednesday, July 18, 2012  
9:32 PM

(a) The question itself actually gives us one way to find the total energy :


$$E = \int_{-\infty}^{\infty} |G(f)|^2 df.$$

By the Parseval's theorem, we know that this is the same as

$$\int_{-\infty}^{\infty} |g(t)|^2 dt \text{ which is easier to calculate.}$$

For  $g(t) = 1[-1 \leq t \leq 1]$ , the total energy is  $\int_{-\infty}^{\infty} (1[-1 \leq t \leq 1])^2 dt = \int_{-1}^1 1 dt = 2.$


Suppose we want to work in the frequency domain. We will first need to find  $G(f)$ .

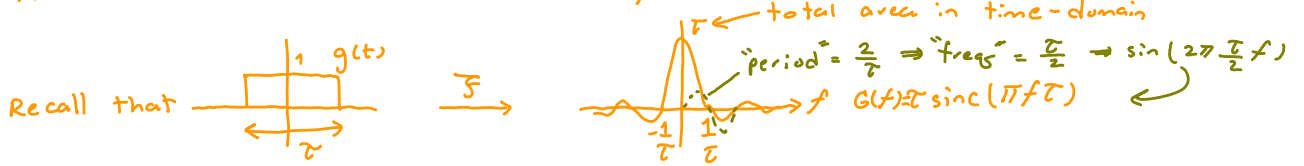

Here,  $\tau = 2$ . So,  $G(f) = 2 \text{ sinc}(2\pi f)$

$$E = \int_{-\infty}^{\infty} |G(f)|^2 df = \int_{-\infty}^{\infty} 2^2 \text{ sinc}^2(2\pi f) df \leftarrow \begin{array}{l} \text{This is} \\ \text{not an} \\ \text{easy integral} \\ \text{to work with.} \end{array}$$

In HW2, we've derived one transform pair:

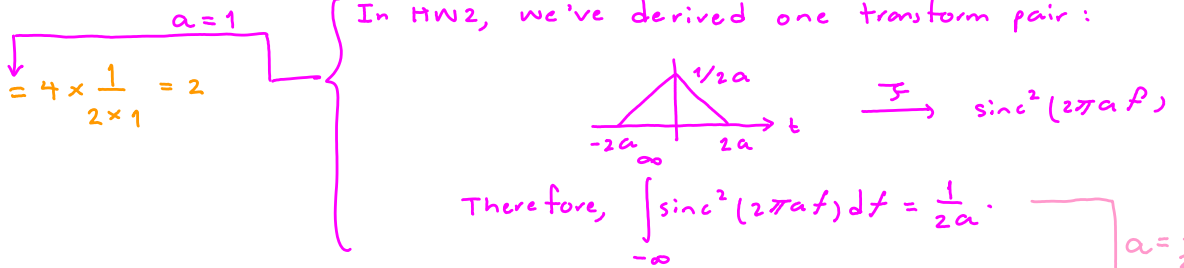

For quick calculation, it may be useful to remember that  $\int_{-\infty}^{\infty} \text{sinc}^2(x) dx = \pi,$

and  $\int_{-\infty}^{\infty} \tau \text{ sinc}(\pi f \tau) df = 1 \Rightarrow \int_{-\infty}^{\infty} \text{sinc}(\pi \tau f) df = \frac{1}{\tau}$   $\tau = \frac{1}{\pi}$

and  $\int_{-\infty}^{\infty} \text{sinc}(ax) dx = \pi.$

(b) If you have not found  $G(f)$  in part (a), this part require you to do so as the first step. However, we've already done this as an alternative solution for part (a). So, we will use that for this part.

The main lobe occupies an interval of frequency from  $f_1 = -\frac{1}{\tau} = -\frac{1}{2}$  to  $f_2 = +\frac{1}{\tau} = +\frac{1}{2}.$


So, the energy contained in the band  $B = [f_1, f_2]$  is given by

$$\int_{-1/2}^{1/2} (2 \text{ sinc}(2\pi f))^2 df \approx 1.8056$$

↑ MATLAB

or  
Wolfram Alpha



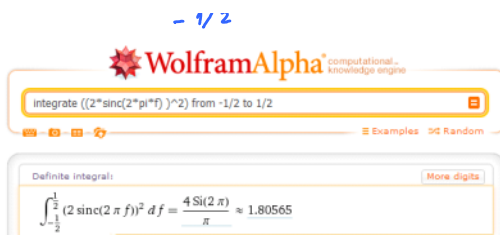

- MATLAB  
or  
Wolfram Alpha  
↙

The fraction of energy contained in the main lobe is  $\approx \frac{1.8056}{2} \approx 0.9028 = 90.28\%$   
 2 ← the answer from part (a)

(c) Using MATLAB, we can look at the fraction of energy as a function of  $f_0$ .  
 We found that at around  $f_0 \approx 5.1$ , the fraction begins to exceed 99%.