



Sirindhorn International Institute of Technology
Thammasat University at Rangsit
School of Information, Computer and Communication Technology

ECS 455: Problem Set 2

Semester/Year: 2/2010

Course Title: Mobile Communications

Instructor: Dr. Prapun Suksompong (prapun@siit.tu.ac.th)

Course Web Site: <http://www2.siiit.tu.ac.th/prapun/ecs455/>

Due date: Dec 14, 2010 (Tuesday) @ 2:39 PM

Instructions

1. ONE sub-question will be graded (5 pt). Of course, you do not know which part will be selected; so you should work carefully on all of them.
2. It is important that you try to solve all problems. (5 pt)
3. Late submission will be heavily penalized.
4. **Write down all the steps** that you have done to obtain your answers. You may not get full credit even when your answer is correct without showing how you get your answer.
5. You may use the MATLAB code from

<http://infohost.nmt.edu/~borchers/erlang.html>

to evaluate the Erlang B formula. Figure 3.6 from [Rappaport, 2002], which is included here in Appendix A, may give a rough approximation.


Please submit your solutions for the following questions.

1. Cellular communication in the USA is limited by the Federal Communication Commission (FCC) to one of three frequency bands, one around 0.9 GHz, one around 1.9 GHz, and one around 5.8 GHz. Find the corresponding wavelengths.
2. Some possible values of cluster size is $N = 3, 4, \text{ or } 7$. Find the next fifteen lowest values of N .

3. If 20 MHz of total spectrum is allocated for a **duplex** wireless cellular system and each **simplex** channel has 25 kHz RF bandwidth, find:
- the number of duplex channels.
 - the total number of channels per cell site, if $N = 4$ cell reuse is used.
4. In this question, we will find the unsectorized (using omnidirectional antennas) SIR value when $N = 3$.
- Recall that the SIR can be calculated from

$$\frac{S}{I} = \frac{kR^{-\gamma}}{\sum_{i=1}^K kD_i^{-\gamma}}$$

where D_i is the distance from the i th interfering co-channel cell base station. Find all the distance D_i in the figure below.

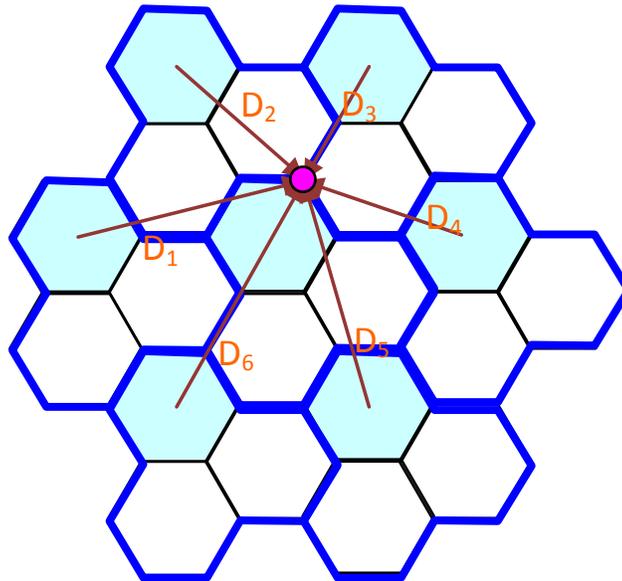

Express them as a function of R (the distance from the center of the hexagon to its vertex.)
Hint: $D_1 = \sqrt{13}R$.

- Calculate the SIR (in dB) using the D_i values that you got from part (a). Assume a path loss exponent of $\gamma = 4$.
- Approximate all value of D_i by the **center-to-center** distance D between the nearest co-channel. Express D as a function of R . Recalculate the SIR (in dB) with all D_i replaced by D .
- Compare your answers from part (b) and part (c).

5. A cellular service provider decides to use a digital TDMA scheme which can tolerate a signal-to-interference ratio of 15 dB in the worst case. Find the optimal value of N for (a) omnidirectional antennas, (b) 120° sectoring, and (c) 60° sectoring. (Assume a path loss exponent of $\gamma = 4$.)

Hint: Approximate the SIR value by

$$\frac{S}{I} = \frac{kR^{-\gamma}}{K \times (kD^{-\gamma})} = \frac{1}{K} \left(\frac{D}{R} \right)^\gamma = \frac{1}{K} (\sqrt{3N})^\gamma$$

where K is the number of (first-tier) interfering (co-channel) base stations.

6. How many users can be supported for 0.5% blocking probability for the following number of trunked channels in a blocked calls cleared system?

- (a) 5
- (b) 15
- (c) 25

Assume each user generates 0.1 Erlangs of traffic.

7. Assume each user of a single base station mobile radio system averages three calls per hour, each call lasting an average of 5 minutes.
- (a) What is the traffic intensity for each user?
 - (b) Find the number of users that could use the system with 1% blocking if only one channel is available.
 - (c) Find the number of users that could use the system with 1% blocking if five trunked channels are available.
 - (d) If the number of users you found in (c) is suddenly doubled, what is the new blocking probability of the five channel trunked mobile radio system?

Appendix A

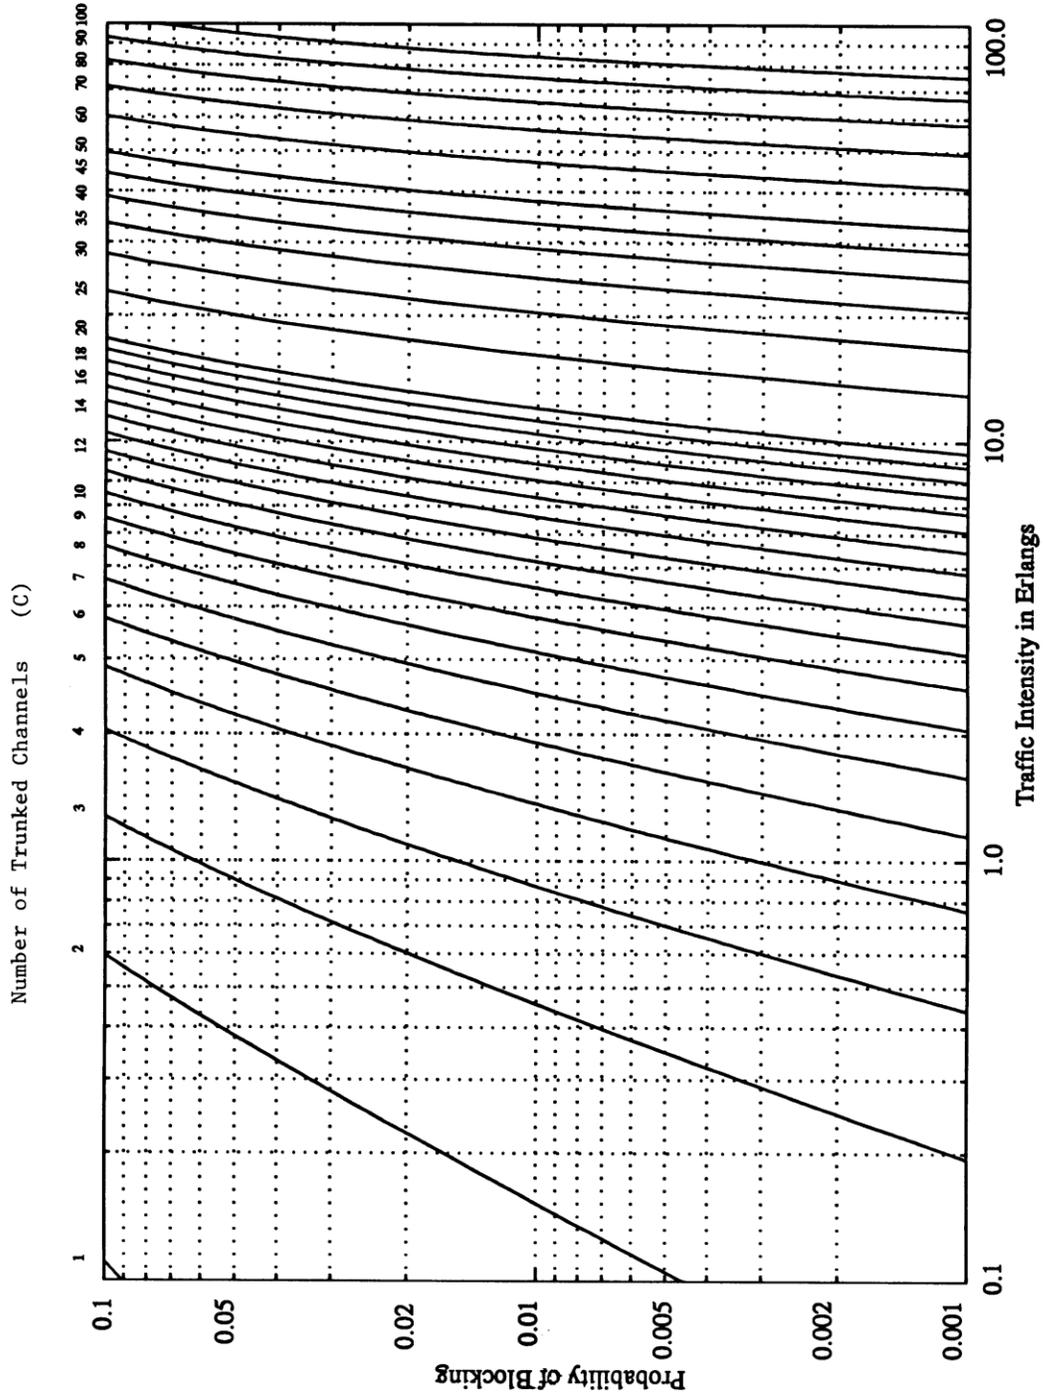


Figure 3.6 The Erlang B chart showing the probability of blocking as functions of the number of channels and traffic intensity in Erlangs.