

ECS 332: Principles of Communications

2017/1

HW 1 — Due: Sep 1, 4 PM **Solution**

Lecturer: Prapun Suksompong, Ph.D.

**Instructions**

- (a) This assignment has 5 pages.
- (b) (1 pt) Work and write your answers directly on these provided sheets (not on other blank sheet(s) of paper). Hard-copies are distributed in class.
- (c) (1 pt) Write your first name and the last three digits of your student ID on the upper-right corner of this page.
- (d) (8 pt) Try to solve all problems.
- (e) Late submission will be heavily penalized.

**Problem 1.** In class, we have seen how to use the Euler's formula to show that

$$\cos^2 x = \frac{1}{2} (\cos(2x) + 1).$$

For this question, *apply similar technique* to show that

$$\cos A \cos B = \frac{1}{2} (\cos(A+B) + \cos(A-B)).$$

$$\begin{aligned} \cos A \cos B &= \frac{1}{2} (e^{jA} + e^{-jA}) \times \frac{1}{2} (e^{jB} + e^{-jB}) \\ &= (e^{jA} + e^{-jA}) (e^{jB} + e^{-jB}) \times \frac{1}{4} \\ &= \underbrace{(e^{j(A+B)} + e^{-j(A+B)})}_{2 \cos(A+B)} + \underbrace{(e^{j(A-B)} + e^{-j(A-B)})}_{2 \cos(A-B)} \times \frac{1}{4} \\ &= \frac{1}{2} (\cos(A+B) + \cos(A-B)) \end{aligned}$$

Steps:


- ① Replace cos and sin with complex exponential functions.
- ② Simplify or rearrange the expression
- ③ Convert back to cos and sin

First, we convert the given expressions into complex exponential functions. Then, we use the fact that  $e^{j2\pi f_0 t}$  in the time domain corresponds to the delta function at  $f = f_0$  in the frequency domain

**Problem 2.** Plot (by hand) the Fourier transforms of the following signals

(a)  $\cos(20\pi t) = \frac{e^{jA} + e^{-jA}}{2} = \frac{1}{2} e^{jA} + \frac{1}{2} e^{-jA} = \frac{1}{2} e^{j2\pi(10)t} + \frac{1}{2} e^{j2\pi(-10)t}$   
 $A = 2\pi(10)t$

So, the plot of its Fourier transform is

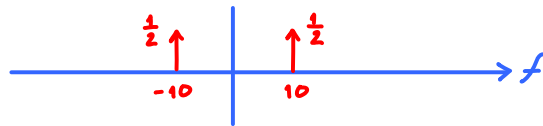


Alternatively, one may simply remember that the Fourier transform of  $\cos(2\pi f_0 t)$  is simply delta functions of size  $\frac{1}{2}$  at  $f_0$  and  $-f_0$ .

(b)  $\cos(20\pi t) + \cos(40\pi t)$

For  $\cos(40\pi t)$ , the corresponding frequencies are  $\pm 20$  Hz.

$2\pi f_0 t = 40\pi t$   
 $f_0 = 20$


So, the plot of the Fourier transform of  $\cos(20\pi t) + \cos(40\pi t)$  is

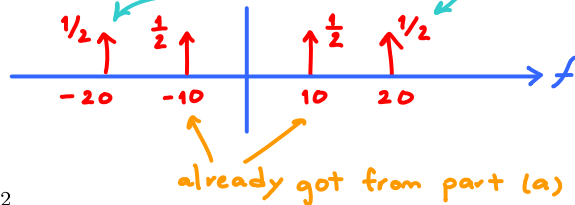

(c)  $(\cos(20\pi t))^2$


$(\cos(20\pi t))^2 = (\cos A)^2 = \left(\frac{1}{2}(e^{jA} + e^{-jA})\right)^2 = \frac{1}{4}(e^{2jA} + 2 + e^{-2jA})$   
 $A = 20\pi t = 2\pi(10)t$   
 $= \frac{1}{4} e^{j2\pi(20)t} + \frac{1}{2} e^{j2\pi(0)t} + \frac{1}{4} e^{j2\pi(-20)t}$

So, the plot of its Fourier transform is

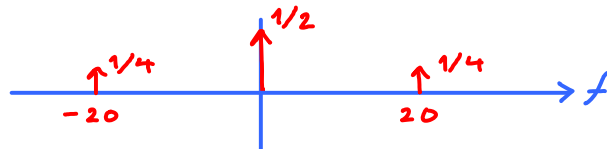


(d)  $\cos(20\pi t) \times \cos(40\pi t) = \cos(A)\cos(B) = \frac{1}{2}(e^{jA} + e^{-jA}) \frac{1}{2}(e^{jB} + e^{-jB})$   
 $A = 20\pi t = 2\pi(10)t$      $B = 40\pi t = 2\pi(20)t$   
 $= \frac{1}{4} (e^{j(A+B)} + e^{j(-A+B)} + e^{j(A-B)} + e^{j(-A-B)})$

$= \frac{1}{4} (e^{j2\pi(30)t} + e^{j2\pi(10)t} + e^{j2\pi(-10)t} + e^{j2\pi(-30)t})$

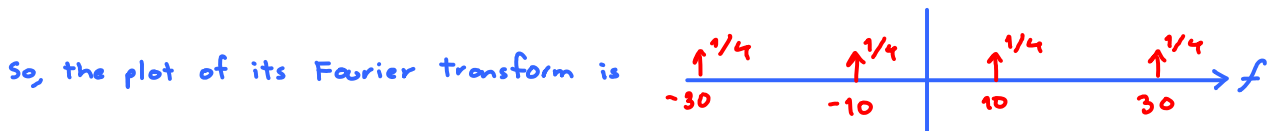

$$\begin{aligned}
 \text{(e) } (\cos(20\pi t))^2 \times \cos(40\pi t) &= \underbrace{\left( \frac{1}{4} e^{j2\pi(20)t} + \frac{1}{2} + \frac{1}{4} e^{j2\pi(20)t} \right)}_{\text{from part (c)}} \times \left( \frac{1}{2} e^{j2\pi(20)t} + \frac{1}{2} e^{j2\pi(-20)t} \right) \\
 &= \frac{1}{8} e^{j2\pi(40)t} + \frac{1}{4} e^{j2\pi(20)t} + \underbrace{\frac{1}{8} e^0 + \frac{1}{8} e^0}_{\frac{1}{4} e^{j2\pi(0)t}} + \frac{1}{4} e^{j2\pi(-20)t} + \frac{1}{8} e^{j2\pi(-40)t}
 \end{aligned}$$

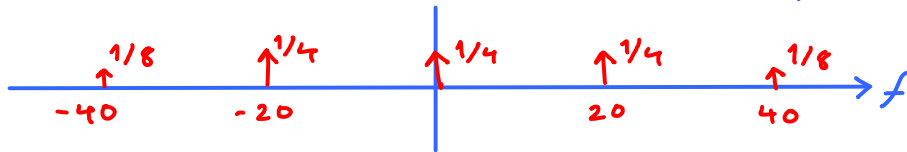

**Problem 3.** Evaluate the following integrals:

(a) First, recall that  $\int_A \delta(t) dt = \begin{cases} 1, & 0 \in A, \\ 0, & 0 \notin A. \end{cases}$  In particular,  $\int_{-\infty}^{\infty} \delta(t) dt = 1.$

(i)  $\int_{-\infty}^{\infty} 2\delta(t) dt = 2 \int_{-\infty}^{\infty} \delta(t) dt = 2 \times 1 = 2.$

(ii)  $\int_{-3}^2 4\delta(t-1) dt$

Consider the function  $4\delta(t-1)$  graphically.

The area under the curve from -3 to 2 includes the arrow area which is 4.

So,  $\int_{-3}^2 4\delta(t-1) dt = 4.$

(iii)  $\int_{-3}^2 4\delta(t-3) dt$

Consider the function  $4\delta(t-3)$  graphically.

The area under the curve from -3 to 2 does not include the arrow area.

Therefore,  $\int_{-3}^2 4\delta(t-3) dt = 0.$

(b)  $\int_{-\infty}^{\infty} \delta(t) e^{-j2\pi ft} dt = \int_{-\infty}^{\infty} g(t) \delta(t) dt = g(0) = e^{-j2\pi f \cdot 0} \Big|_{t=0} = e^0 = 1$

↑  
sifting property

(c)

(i)  $\int_{-\infty}^{\infty} \delta(t-2) \sin(\pi t) dt = \int_{-\infty}^{\infty} g(t) \delta(t-2) dt = g(2) = \sin(\pi t) \Big|_{t=2} = \sin(2\pi) = 0$

↑  
sifting property v2

(ii)  $\int_{-\infty}^{\infty} \delta(t+3) e^{-t} dt = \int_{-\infty}^{\infty} g(t) \delta(t - (-3)) dt = g(-3) = e^{-(-3)} = e^3$  sifting property v2

(iii)  $\int_{-\infty}^{\infty} e^{(x-1)} \cos\left(\frac{\pi}{2}(x-5)\right) \delta(x-3) dx = \int_{-\infty}^{\infty} g(x) \delta(x-3) dx = g(3) = e^{3-1} \cos\left(\frac{\pi}{2}(3-5)\right) = e^2 \cos(-\pi) = -e^2$  sifting property v2

Note that the "x" here is just a dummy variable. It takes the role of "t" in our formula.

(d) This part has the delta function in the form  $\delta(T-t)$ . We use the "change of variables" technique to evaluate the integral:  $\int_{-\infty}^{\infty} g(t) \delta(T-t) dt = \int_{-\infty}^{\infty} g(T-\tau) \delta(\tau) d\tau$

(i)  $\int_{-\infty}^{\infty} (t^3 + 4) \delta(1-t) dt = t^3 + 4 \Big|_{t=1} = 1^3 + 4 = 1 + 4 = 5$

(ii)  $\int_{-\infty}^{\infty} g(2-t) \delta(3-t) dt = g(2-t) \Big|_{t=3} = g(2-3) = g(-1)$

Remark: From  $\int_{-\infty}^{\infty} g(t) \delta(T-t) dt = g(T)$ , we get  $\int_{-\infty}^{\infty} g(\tau) \delta(t-\tau) d\tau = g(t)$  simply by variable renaming ( $\frac{t}{T} \rightarrow \frac{\tau}{\tau}$ )

(e)  $\int_{-2}^2 \delta(2t) dt = \int_{-4}^4 \delta(x) \frac{1}{2} dx = \frac{1}{2} \times \int_{-4}^4 \delta(x) dx = \frac{1}{2} \times 1 = \frac{1}{2}$

change of variables  $\begin{cases} x = 2t \\ t = \frac{1}{2}x \\ dt = \frac{1}{2}dx \end{cases}$

Alternatively, we know that  $\delta(at) = \frac{1}{|a|} \delta(t)$ . Therefore,  $\delta(2t) = \frac{1}{2} \delta(t)$ .

Hence,  $\int_{-2}^2 \delta(2t) dt = \int_{-2}^2 \frac{1}{2} \delta(t) dt = \frac{1}{2} \int_{-2}^2 \delta(t) dt = \frac{1}{2} \times 1 = \frac{1}{2}$

Problem 4. Consider the signal  $g(t)$  shown in Figure 1.1.

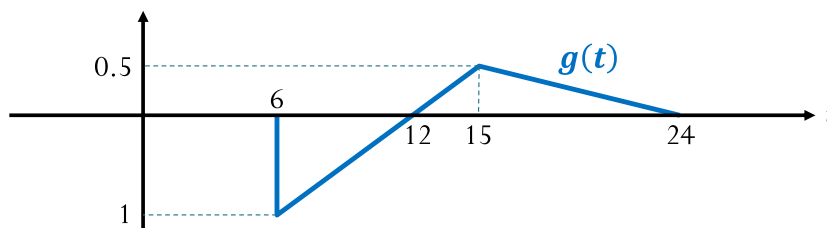


Figure 1.1: Problem 4

(a) Carefully sketch the following signals:

(i)  $y_1(t) = g(-t)$

(ii)  $y_2(t) = g(t+6)$

(a)

(i) Recall the time inversion (time reversal) operation

$g(-t)$  is the mirror image of  $g(t)$  about the vertical axis.

(ii) Recall the time shifting operation:

$g(t-T)$  represents  $g(t)$  time-shifted by  $T$ .

If  $T$  is positive, the shift is to the right (delay).

If  $T$  is negative, the shift is to the left (by  $|T|$ ).

Here,  $y_2(t) = g(t+6) = g(t-(-6))$ .

So,  $y_2(t)$  is simply  $g(t)$  shifted to the left by 6 time units.

(iii) Recall the time scaling operation:

$g(at)$  is  $g(t)$  compressed in time by the factor  $a$ .

↑ for  $a > 1$

So,  $y_3(t) = g(3t)$  is simply  $g(t)$  compressed in time by a factor of 3.

(iv) The tricky one would be  $g(6-t)$ .


There are two ways to think about it

①  $g(t) \xrightarrow{\text{time inversion}} g(-t) \xrightarrow{\text{time shift, } T=6} g(-(t-6))$   
mirror image about the vertical axis      shift to the right by 6

②  $g(t) \xrightarrow{\text{time shift, } T=-6} g(t+6) \xrightarrow{\text{time inversion}} g(-t+6)$   
shift to the left by 6      mirror image of  $g(t+6)$  about the vertical axis

(iii)  $y_3(t) = g(3t)$

(iv)  $y_4(t) = g(6 - t)$ .

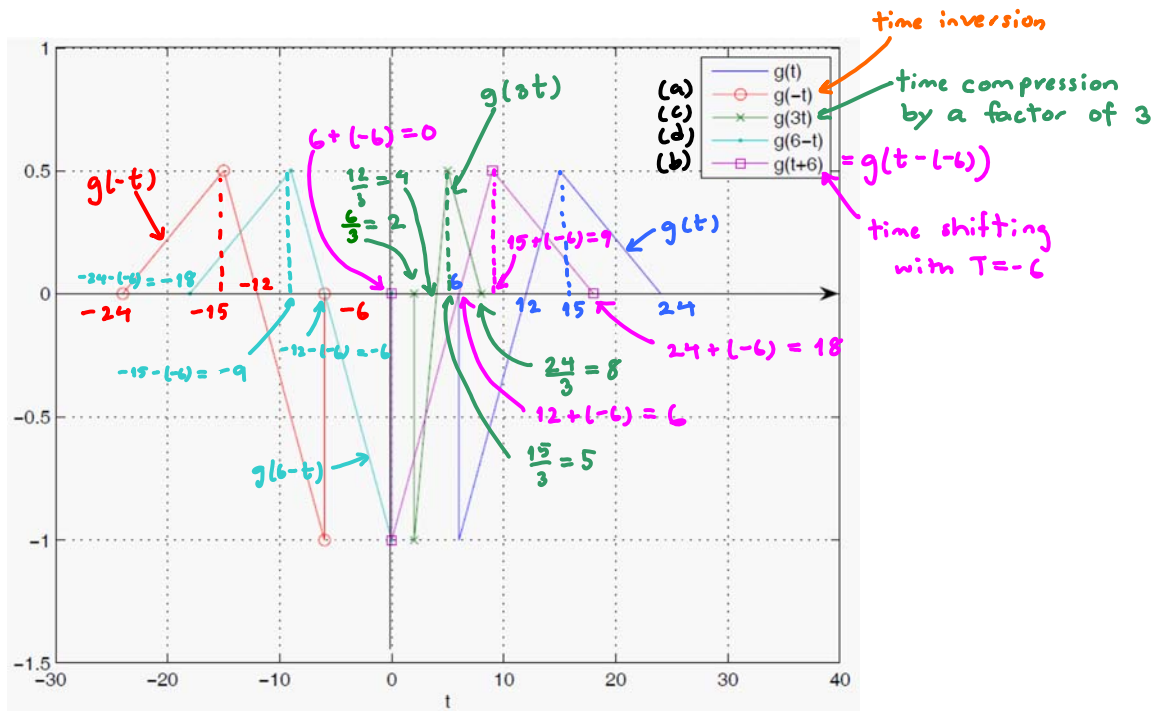

(b) Find the “net” area under the graph for each of the signals in the previous part. (Mathematically, this is equivalent to integrating each signal from  $-\infty$  to  $+\infty$ . However, directly calculating and combining positive and negative areas from the plots should be easier.) *First, note that, for any constant  $m, c$ ,*

$$\int_{-\infty}^{\infty} g(mt+c) dt = \begin{cases} \int_{-\infty}^{\infty} g(x) \frac{1}{m} dx = \frac{1}{m} \int_{-\infty}^{\infty} g(x) dx & m > 0 \\ \int_{\infty}^{-\infty} g(x) \frac{1}{m} dx = -\frac{1}{m} \int_{-\infty}^{\infty} g(x) dx & m < 0 \end{cases} = \frac{1}{|m|} \int_{-\infty}^{\infty} g(x) dx$$

$x = mt + c$   
 $dx = m dt$   
 $dt = \frac{1}{m} dx$

Now, for us,  $\int_{-\infty}^{\infty} g(t) dt = \underbrace{\left(-\frac{1}{2} \times 1 \times 6\right)}_{\substack{\text{area under} \\ \text{the first triangle}}} + \left(\frac{1}{2} \times \frac{1}{2} \times 12\right) = -3 + 3 = 0$ .

Therefore,  $\int_{-\infty}^{\infty} g(mt+c) dt = 0$  for any  $m, c$ .

Note:

	$m$	$c$
(i)	-1	0
(ii)	1	6
(iii)	0	0
(iv)	-1	6