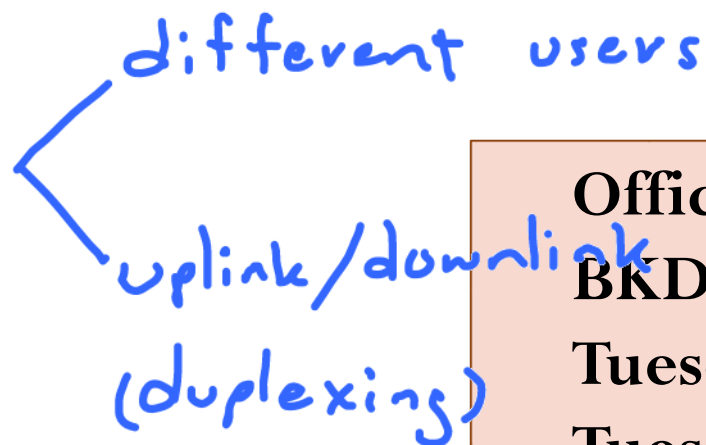


ECS455: Chapter 4

Multiple Access

Asst. Prof. Dr. Prapun Suksompong

prapun@siit.tu.ac.th

Resource sharing 

Office Hours:

BKD 3601-7

Tuesday 9:30-10:30

Tuesday 13:30-14:30

Thursday 13:30-14:30

ECS455: Chapter 4

Multiple Access

Duplexing

4.1 TDD and FDD

Duplexing


- Allow the subscriber to send “simultaneously” information to the base station while receiving information from the base station.
 - Talk and listen simultaneously.
- Definitions:
 - **Forward channel** or **downlink (DL)** is used for communication from the infrastructure to the users/stations
 - **Reverse channel** or **uplink (UL)** is used for communication from users/stations back to the infrastructure.
- Two techniques
 1. Frequency division duplexing (FDD)
 2. Time division duplexing (TDD)

Frequency Division Duplexing (FDD)

- Provide *two distinct bands* of frequencies (simplex channels) for every user.
- The **forward band** provides traffic from the base station to the mobile.
- The **reverse band** provides traffic from the mobile to the base station.
- Any *duplex* channel actually consists of two *simplex* channels (a forward and reverse).
- Most commercial cellular systems are based on FDD.


FDD Examples

GSM

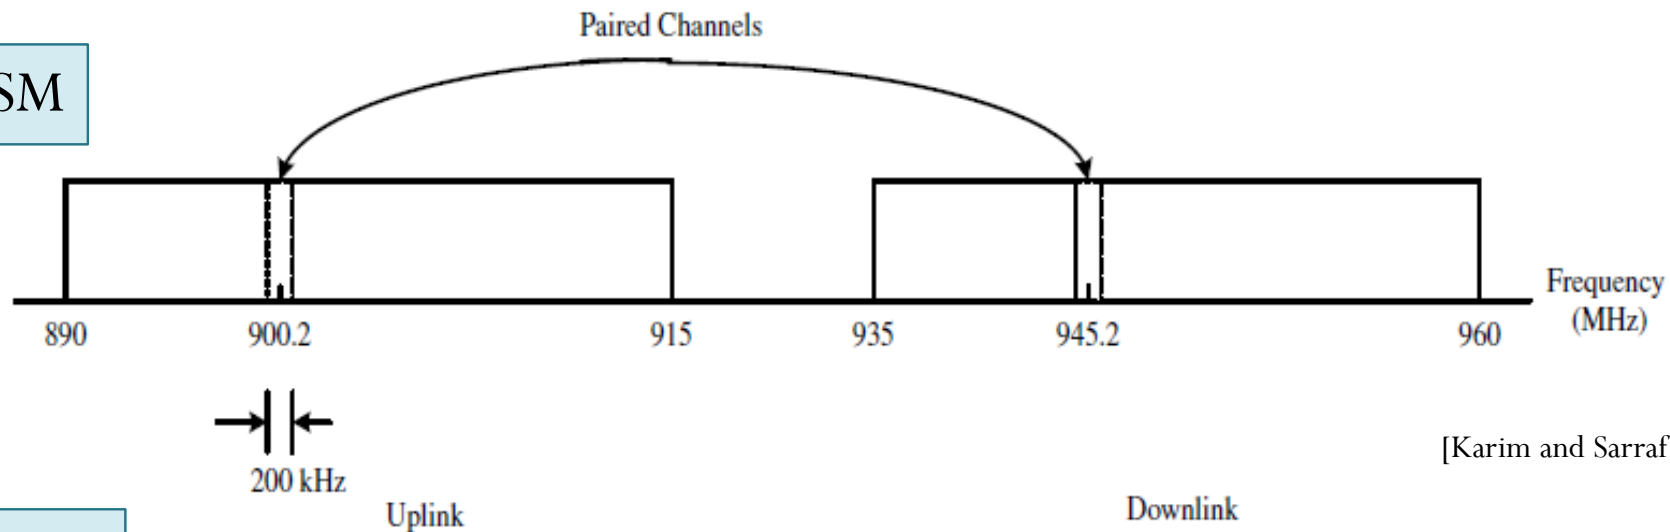

[Karim and Sarraf, 2002, Fig 5-1]

UMTS

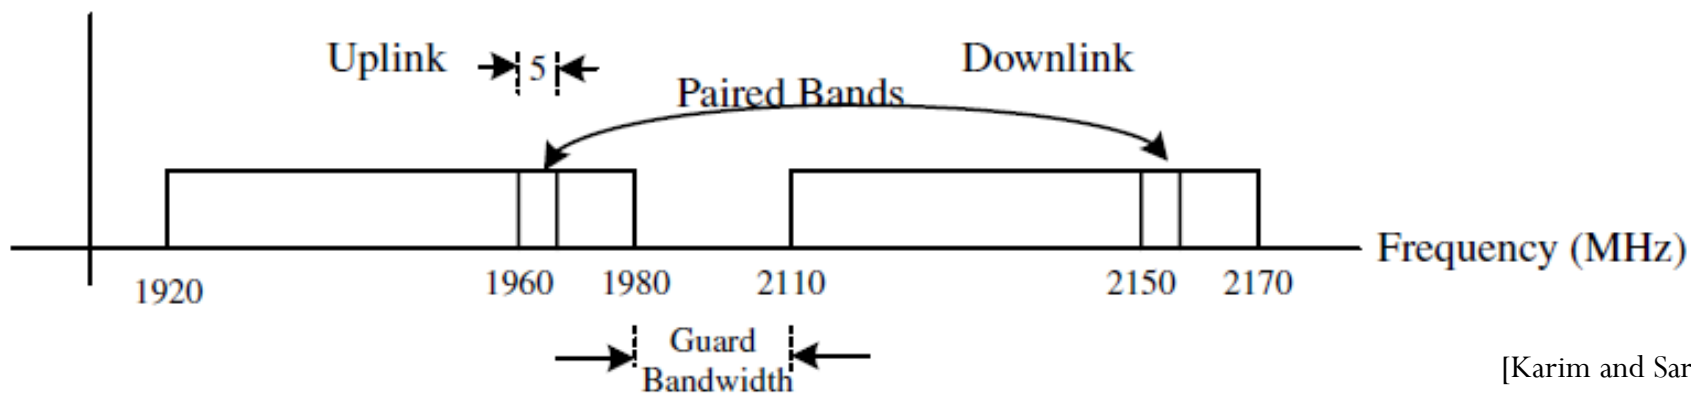

[Karim and Sarraf, 2002, Fig 6-1]

Time Division Duplexing (TDD)

- The UL and DL data are transmitted on the **same carrier frequency** at different times. (Taking turns)
 - Use time instead of frequency to provide both forward and reverse links.
 - Each *duplex* channel has both a **forward time slot** and a **reverse time slot**.
- If the *time separation* between the forward and reverse time slot is *small*, then the transmission and reception of data *appears* simultaneous to the users at both the subscriber unit and on the base station side.
- Used in Bluetooth and Mobile WiMAX

Problems of FDD

- Each transceiver simultaneously transmits and receives radio signals
 - The signals transmitted and received can vary by more than 100 dB.
 - The signals in each direction need to occupy bands that are *separated far apart* (tens of MHz)
- A device called a **duplexer** is required to filter out any interference between the two bands.

Advantages of FDD

- TDD frames need to incorporate guard periods **equal to the max round trip propagation delay** to avoid interference between uplink and downlink under worst-case conditions.
- There is a **time latency** created by TDD due to the fact that communications is not full duplex in the truest sense.
 - This latency creates inherent sensitivities to propagation delays of individual users.

Advantages of TDD

- Duplexer is not required.
- Enable *adjustment* of the downlink/uplink ratio to efficiently support *asymmetric* DL/UL traffic.
 - With FDD, DL and UL have fixed and generally, equal DL and UL *bandwidths*.
- Assure *channel reciprocity* for better support of link adaptation, MIMO and other closed loop advanced antenna technologies.
- Ability to implement in *nonpaired spectrum*
 - FDD requires a pair of channels
 - TDD only requires a single channel for both DL and UL providing greater flexibility for adaptation to varied global spectrum allocations.

ECS455: Chapter 4

Multiple Access

4.2 Introduction to Multiple Access

Multiple Access Techniques

- Allow **many** mobile users to **share** simultaneously a finite amount of radio spectrum.
- For high quality communications, this must be done without severe degradation in the performance of the system.
- Important access techniques
 1. Frequency division multiple access (FDMA)
 2. Time division multiple access (TDMA)
 3. Spread spectrum multiple access (SSMA)
 - Frequency Hopped Multiple Access (FHMA)
 - Code division multiple access (CDMA)
 4. Space division multiple access (SDMA)
 5. Random access
 - ALOHA

Chapter 4

Multiple Access

4.3 FDMA and TDMA

Frequency division multiple access (FDMA)

- The **oldest** multiple access scheme for wireless communications. *also used for spectrum allocation*
- Used exclusively for multiple access in **1G** down to individual resource units or physical channels.
- Assign individual channels to individual users.
 - Different carrier frequency is assigned to each user so that the resulting spectra do not overlap.
 - During the period of the call, no other user can share the same channel.
- **Band-pass filtering** (or heterodyning) enables separate demodulation of each channel.

FDMA (2)

- If an FDMA channel is not in use, then it sits idle and **cannot** be used by other users to increase or share capacity.
 - It is essentially a wasted resource.
- In FDD systems, the users are assigned a channel as a pair of frequencies.


FDMA / FDD

Time division multiple access (TDMA)

- Divide the radio spectrum into **time slots**.
- In each slot only one user is allowed to either transmit or receive.
- A channel may be thought of as a particular time slot that reoccurs every frame, where N time slots comprise a **frame**.
- Transmit data in a **buffer-and-burst method**
 - The transmission for any user is non-continuous.
 - **Digital** data and digital modulation must be used with TDMA.
 - This results in low battery consumption, since the subscriber transmitter can be turned off when not in use (which is most of the time).
- An obvious choice in the 1980s for digital mobile communications.




FDMA vs. TDMA

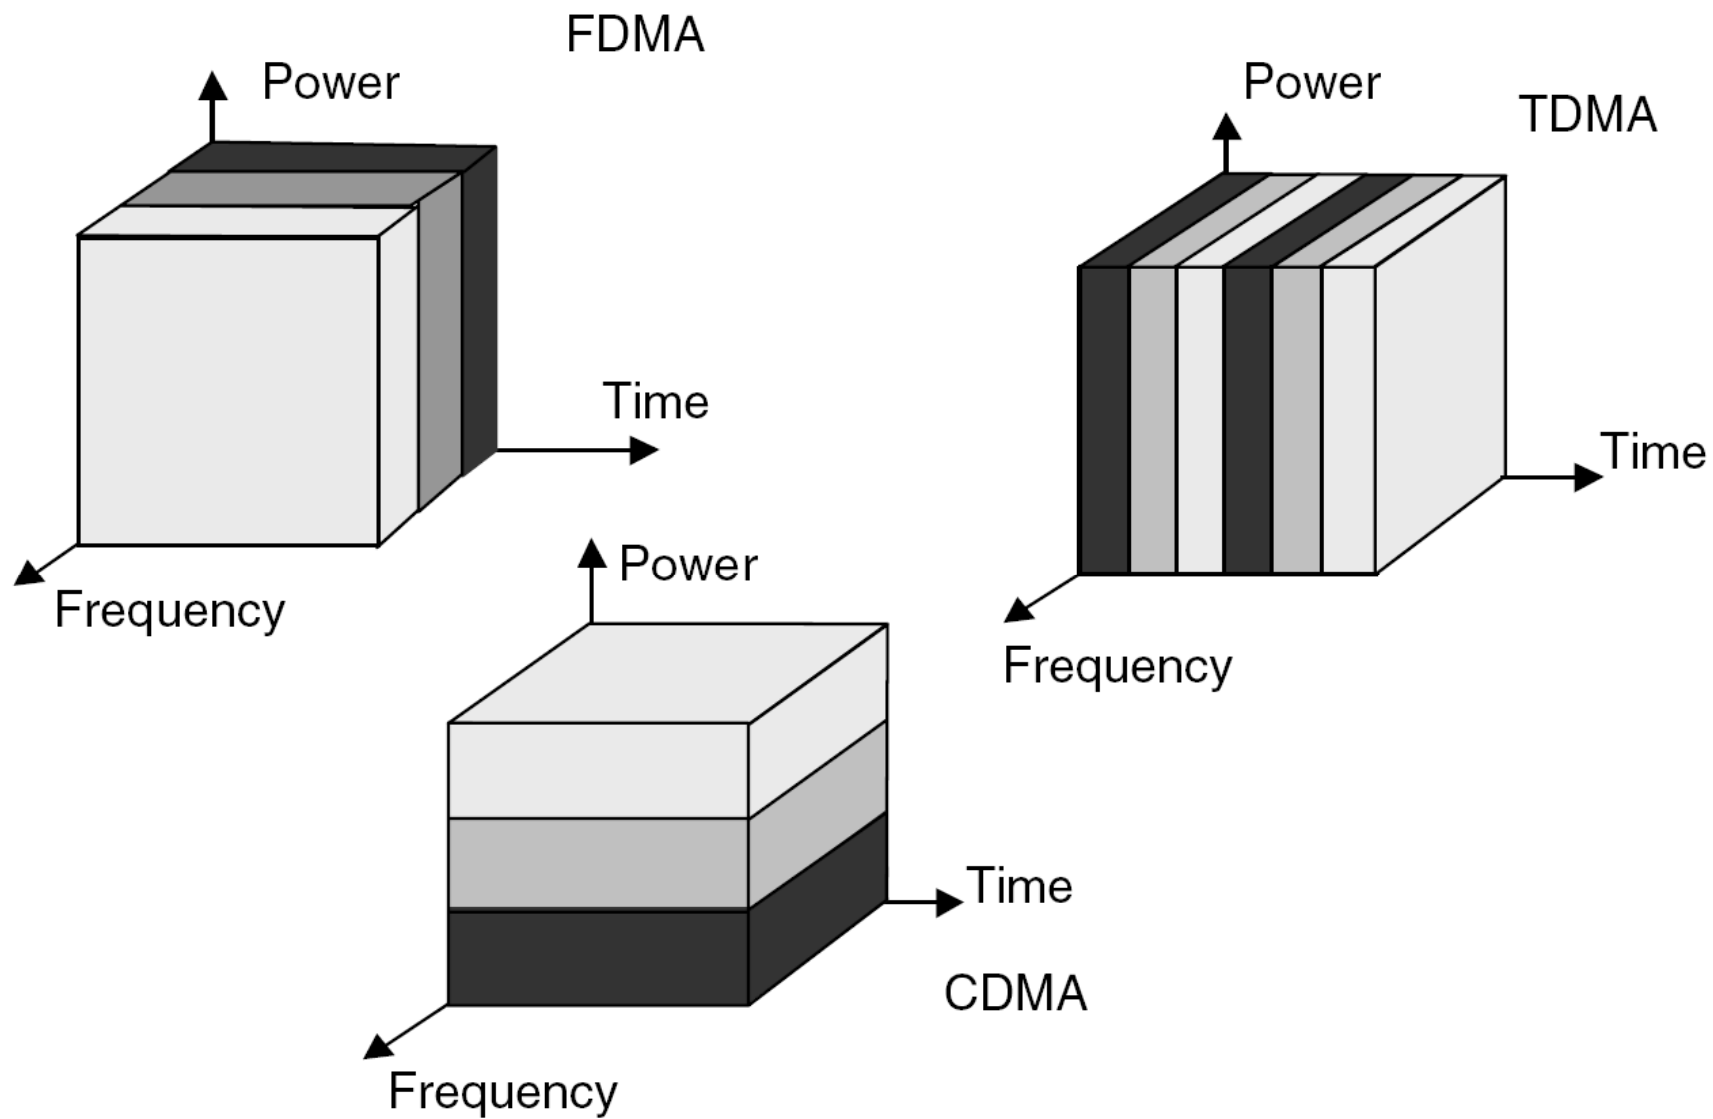


Tradeoffs

- **TDMA** transmissions are slotted
 - Require the receivers to be **synchronized** for each data burst.
 - **Guard times** are necessary to separate users. This results in larger overheads.
 - **FDMA allows completely uncoordinated transmission in the time domain**
 - No time synchronization among users is required.
- The complexity of FDMA mobile systems is lower when compared to TDMA systems, though this is changing as digital signal processing methods improve for TDMA.
- Since FDMA is a continuous transmission scheme, fewer bits are needed for **overhead** purposes (such as synchronization and framing bits) as compared to TDMA.
- FDMA needs to use costly **bandpass filters**.
 - For TDMA, no filters are required to separate individual physical channels.

Guard Band vs. Guard Time

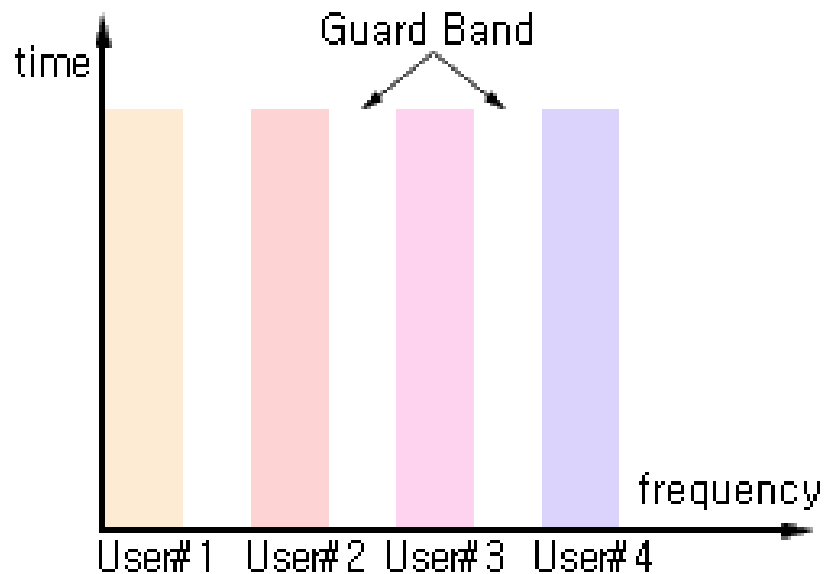


FDMA

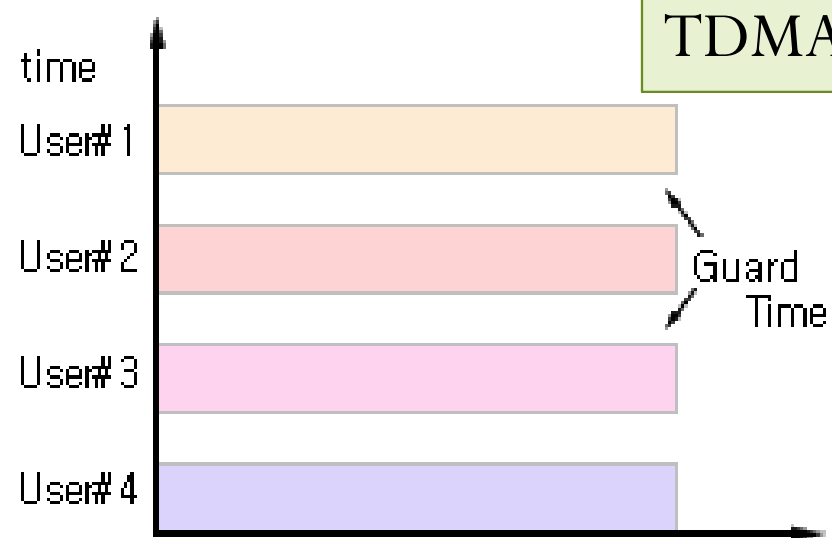

TDMA

Example: GSM

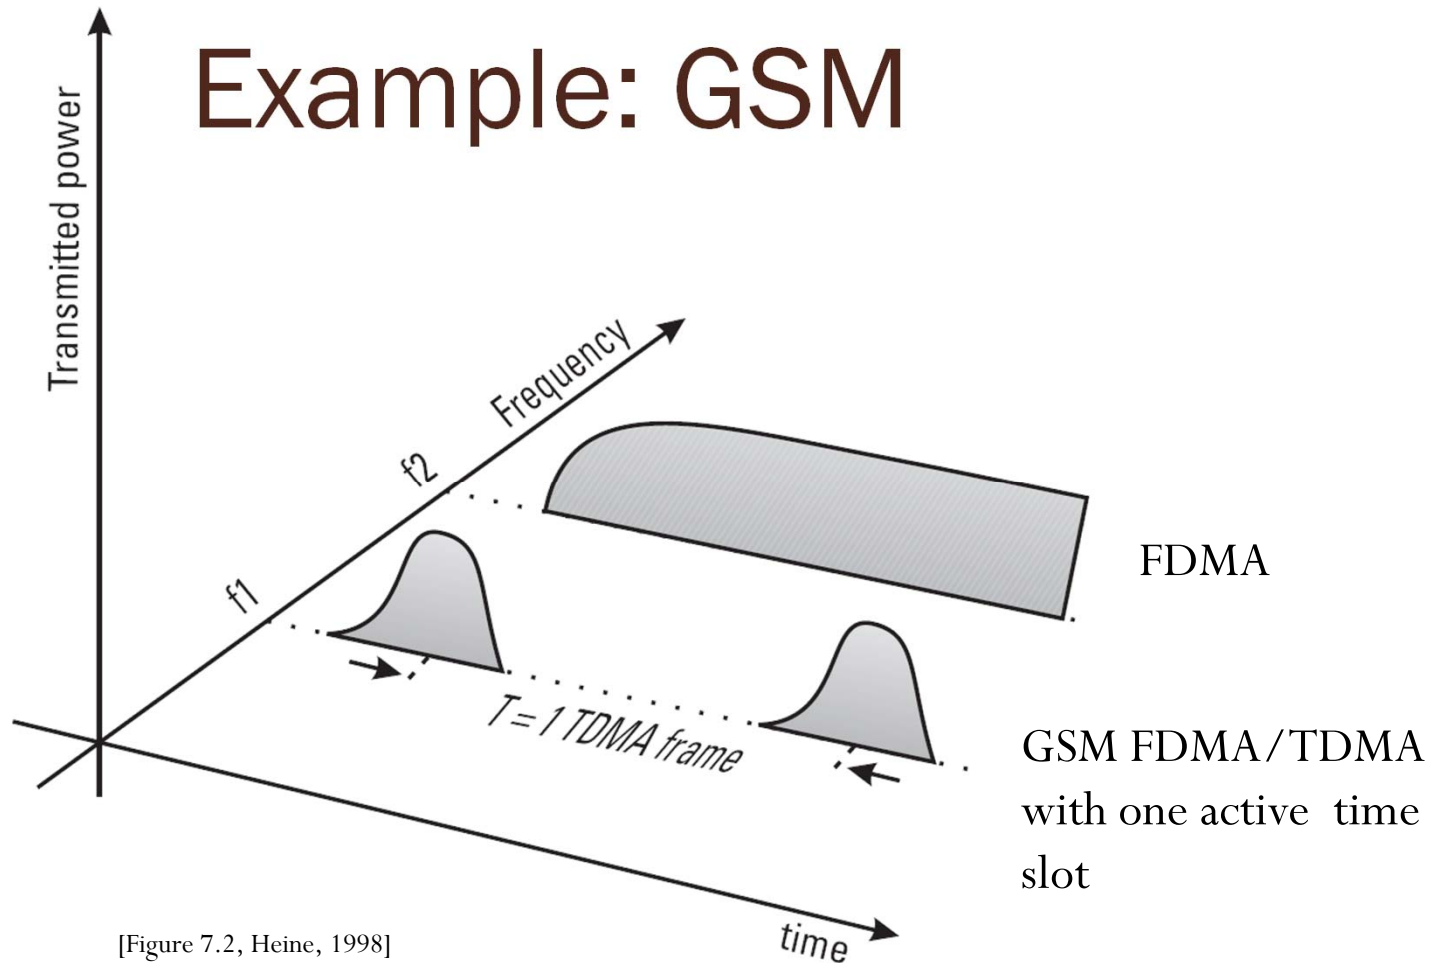


[Figure 7.2, Heine, 1998]

- GSM utilizes a combination of FDMA and TDMA
- Two-dimensional channel structure
- Each narrowband channel has bandwidth 200 kHz.
- Time is divided into slots of length $T = 577 \mu\text{s}$.

The FDMA/TDMA structure of GSM


- In full-rate configuration, eight time slots (TSs) are mapped on every frequency.

A BS with 6 carriers, as shown here, has 48 (8 times 6) physical channels (in fullrate configuration).

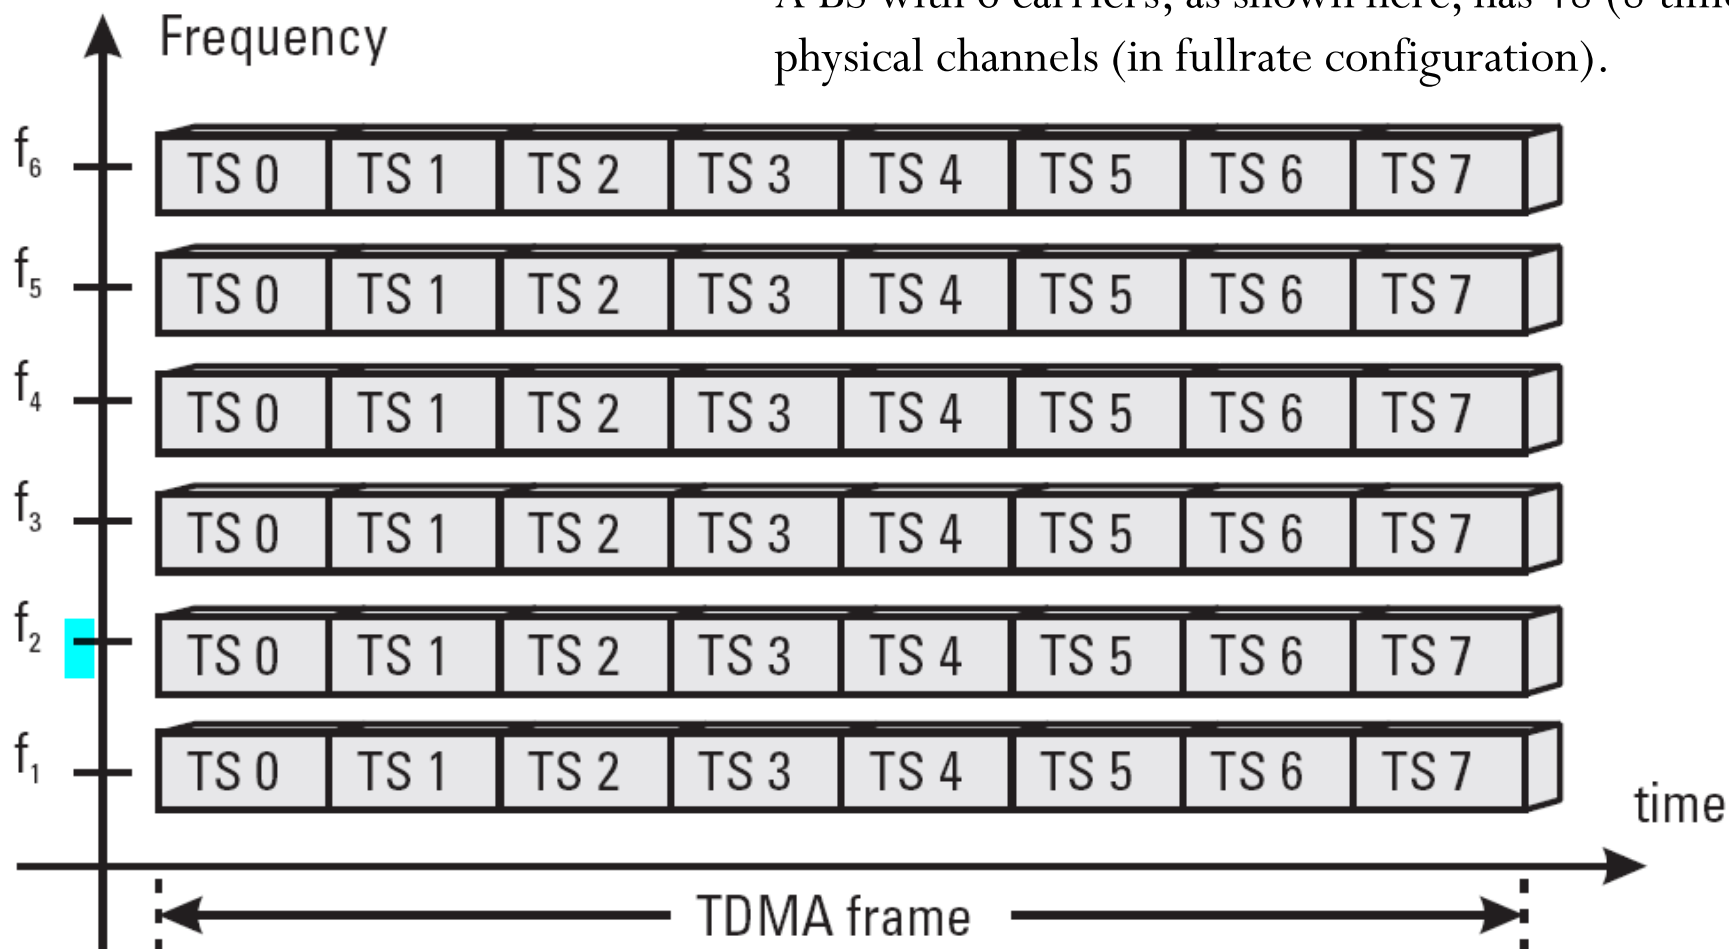

[Figure 7.1, Heine, 1998]

Classifications of Medium Access Control (MAC)

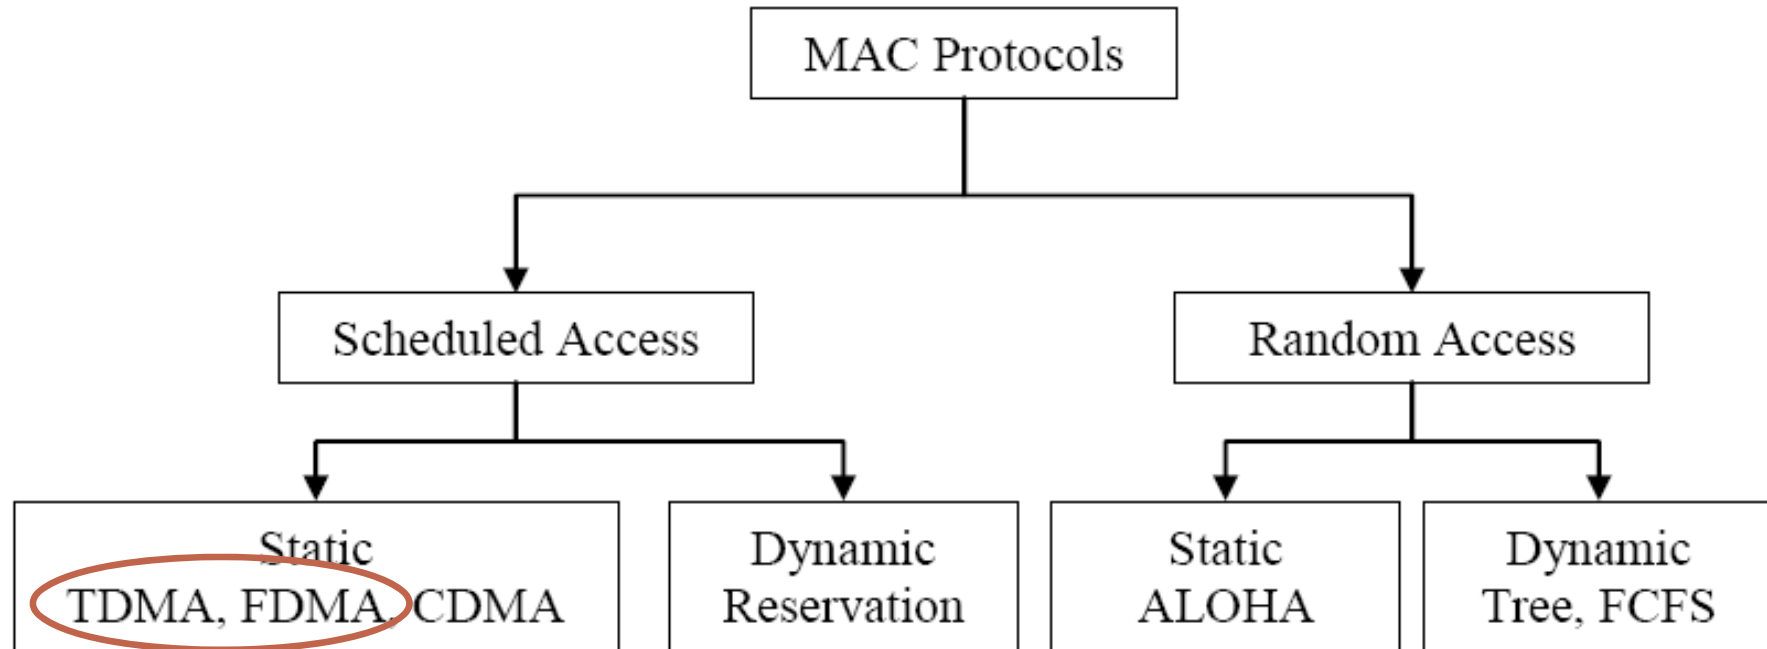

Cellular System	Multiple Access Technique
Advanced Mobile Phone System (AMPS)	FDMA/FDD
Global System for Mobile (GSM)	TDMA/FDD
US Digital Cellular (USDC)	TDMA/FDD
Pacific Digital Cellular (PDC)	TDMA/FDD
CT2 (Cordless Telephone)	FDMA/TDD
Digital European Cordless Telephone (DECT)	FDMA/TDD
US Narrowband Spread Spectrum (IS-95)	CDMA/FDD
W-CDMA (3GPP)	CDMA/FDD CDMA/TDD
cdma2000 (3GPP2)	CDMA/FDD CDMA/TDD